

# WALL/FLAP

## Aluminium hatch with motorised opening function

Suitable for installation in industrial or commercial buildings. Can be used for environmental ventilation.



### Characteristics:


- Extremely robust aluminium structure that is capable of withstanding severe weather conditions.
- Water-tight design to prevent the ingress of water.
- Aluminium profile with thermal bridge break.
- Central panel and structure with high performance thermal insulation.
- Thermal resistance of the assembly <math>< 0.89 \text{ W/m}^2\text{K}</math>.
- Limit switches for both positions (open and closed).
- Can be installed with optional top and bottom openings. Size 125 only for the top opening.
- Manual opening system.

### Finish:

- Anti-corrosive finish extruded aluminium.
- Standard colour RAL 7016. Any RAL colour may be selected upon request.

### Actuator:

- Reliability >11,000 dual cycles.
- Power supply voltage of 230 Vac-50 Hz.
- Operating temperature: -25°C to +60°C.

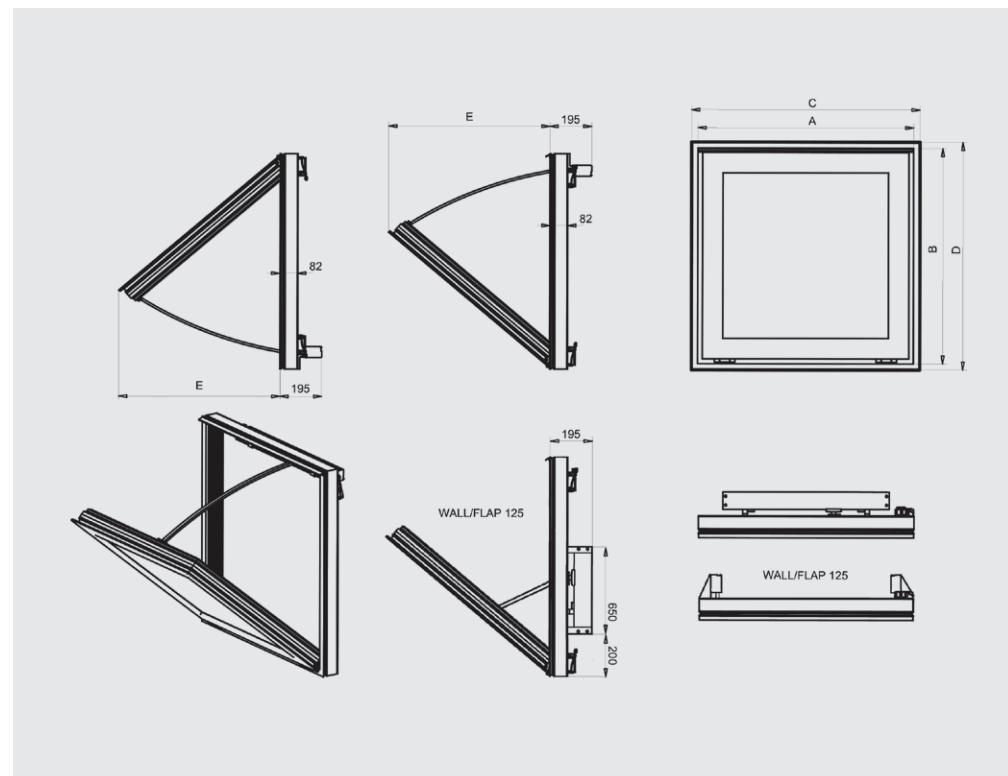

Model	A	B	C	D	F	Weight (kg)	Applicable to
WALL-FLAP-40-45	640	590	650	600	430	12	Diameters 40 and 45
WALL-FLAP-50-56	690	690	700	700	560	14	Diameters 50 and 56
WALL-FLAP-63-71-80	990	990	1000	1000	760	22	Diameters 63, 71 and 80
WALL-FLAP-90-100	1190	1190	1200	1200	790	27	Diameters 90 and 100
WALL-FLAP-125	1490	1490	1500	1500	1240	42	Diameter 125

(C x D) Nominal size of the wall opening.